


## Landscaping Bollard

15W

## Data Sheet

768-1040

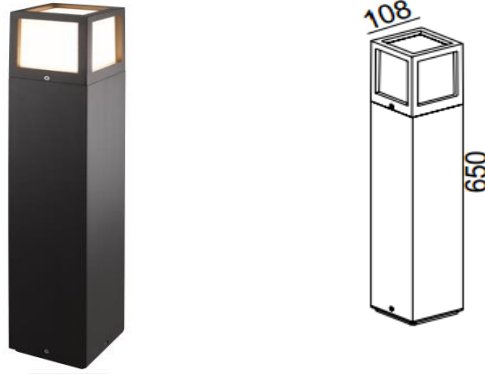

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.  
For a variety of interior and exterior lighting applications.  
The used LED technique offers durability and optimal light output with low power c

### PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium  
Silican rubber gasket  
Powdered coated with pretreatment for outdoor use.  
Opal PC

Dimensions	: 108*108*650mm
Shape	: Square
LED	: SMD
Finish	: Graphite
Correlated Color Temperature (CCT)	: 3000K
Lumens	: 461 lm
Color Rendering Index (CRI)	: 80
Reflector Degree (°)	: 270
Power Factor	: 0.9
Input Voltage	: 200 - 240V 50Hz
Luminaire: Protection class IP 54	: Dust protected (no harmful deposit) & protected against splashing water from any direction