


Landscaping Bollard

Data Sheet

768-1121

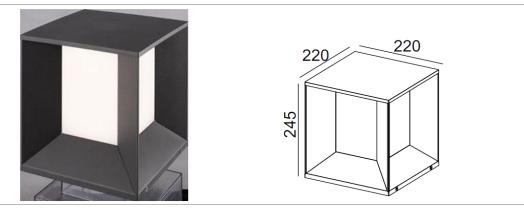

APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass. For a variety of interior and exterior lighting applications. The used LED technique offers durability and optimal light output with low power c

The used LED technique offers durability and optimal light output with low

PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium Silican rubber gasket Powdered coated with pretreatment for out	door use.
Frost PC	
Dimensions	: L220 x W220 x H245 mm
Shape	: Square
LED	: SMD
Finish	: Silver
Correlated Color Temperature (CCT)	: 3000K
Lumens	: 737 lm
Color Rendering Index (CRI)	: 80
Reflector Degree (⁰)	: 81
Power Factor	: 0.9
Input Voltage	: 200 - 240V 50Hz
Protection class IP 65	: Dust tight & Protected against water jets from any direction