


## Post Top Light

18W

## Data Sheet

770-1020

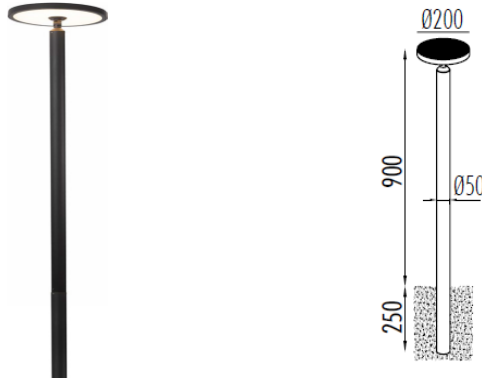

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.

For a variety of interior and exterior lighting applications.

The used LED technique offers durability and optimal light output with low power

### PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium

Silicon rubber gasket

Powdered coated with pretreatment for outdoor use.

Opal PC

AC LED, without driver

Dimensions :  $\phi 200 \times 1150$ mm

LED : SMD

Finish : Graphite (Powdered)

Correlated Color Temperature (CCT) : 3000K

Lumens : 510 lm

Color Rendering Index (CRI) : 80

Reflector Degree ( $^{\circ}$ ) : 107

Power Factor : 0.9

Input Voltage : 200 - 240V 50Hz

Luminaire: Protection class IP 54 : Dust protected (no harmful deposit) &  
Protected against splashing water from  
any direction