


Post Top Light

36W

Data Sheet

770-1024

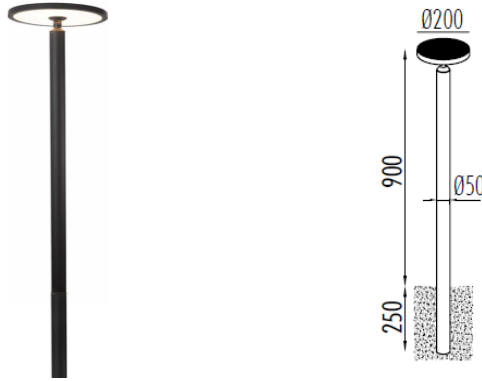

APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.

For a variety of interior and exterior lighting applications.

The used LED technique offers durability and optimal light output with low power

PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium

Silicon rubber gasket

Powdered coated with pretreatment for outdoor use.

Opal PC

AC LED, without driver

Dimensions : $\phi 200 \times 1150$ mm

LED : SMD

Finish : Graphite (Powdered)

Correlated Color Temperature (CCT) : 3000K

Lumens : 1104 lm

Color Rendering Index (CRI) : 80

Reflector Degree ($^{\circ}$) : 107

Power Factor : 0.9

Input Voltage : 200 - 240V 50Hz

Luminaire: Protection class IP 54 : Dust protected (no harmful deposit) &
Protected against splashing water from
any direction