Floor Surface Mounted Spot Light

Data Sheet

7W

766-6020

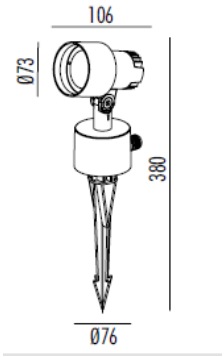

APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.
For a variety of interior and exterior lighting applications.
The used LED technique offers durability and optimal light output with low power c

PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium
Silicon rubber gasket
Powdered coated with pretreatment for outdoor use.
Frost PC

Dimensions	: Φ73 x D106 x H380 mm
Shape	: Round
LED	: COB
Finish	: Graphite
Correlated Color Temperature (CCT)	: 3000K
Lumens	: 372 lm
Color Rendering Index (CRI)	: 80
Reflector Degree (^{0})	: 37
Power Factor	: 0.5
Input Voltage	: 200 - 240V 50Hz
Protection class IP 65	: Dust tight & Protected against water jets from any direction