


Floor Surface Mounted Spot Light

Data Sheet

15W

766-6040

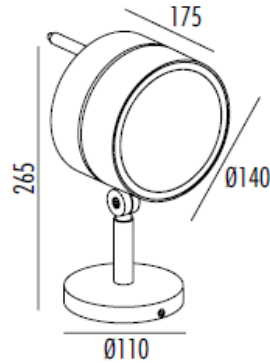

APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.
For a variety of interior and exterior lighting applications.
The used LED technique offers durability and optimal light output with low power c

PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium	
Silicon rubber gasket	
Powdered coated with pretreatment for outdoor use and clear glass	
Dimension	: 140*175*265mm
Shape	: Round
LED	: COB
Finish	: Graphite
Correlated Color Temperature (CCT)	: 3000K
Lumens	: 921 lm
Color Rendering Index (CRI)	: 80
Reflector Degree (°)	: 24
Power Factor	: 0.8
Input Voltage	: 200 - 240V
Luminaire: Protection class IP 65	: Dust tight & Protected against water jets from any direction