


## Floor Surface Mounted Spot Light

## Data Sheet

24W

766-6060

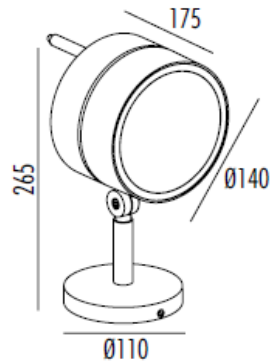

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.

For a variety of interior and exterior lighting applications.

The used LED technique offers durability and optimal light output with low power c

### PRODUCT SPECIFICATIONS

Luminaire made of Die cast Aluminium

Silicon rubber gasket

Powdered coated with pretreatment for outdoor use and clear glass

Dimension : 140\*175\*265mm

Shape : Round

LED : SMD

Finish : Graphite

Correlated Color Temperature (CCT) : 3000K

Lumens : 1000 lm

Color Rendering Index (CRI) : 80

Reflector Degree (°) : 29

Power Factor : 0.8

Input Voltage : 200 - 240V

Luminaire: Protection class IP 65 : Dust tight & Protected against water jets from any direction