


Wall Light

2 x 4.5W

Data Sheet

774-1040

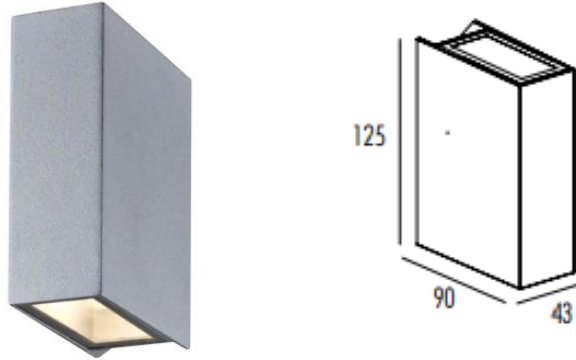

APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.
For a variety of interior and exterior lighting applications.
The used LED technique offers durability and optimal light output with low power c

PRODUCT SPECIFICATIONS

Body and bracket in die-cast aluminium	
Silicon rubber gasket	
Powdered coated with pretreatment for outdoor use.	
Clear PC	
Dimensions	: L90 x W43 x H125mm
Shape	: N/A
LED	: COB
Finish	: White
Correlated Color Temperature (CCT)	: 3000K
Lumens	: 210 lm
Color Rendering Index (CRI)	: 80
Reflector Degree (°)	: 50
Power Factor	: 0.9
Input Voltage	: 200 - 240V 50Hz
Luminaire: Protection class IP 54	: Dust protected (no harmful deposit) & protected against splashing water from any direction