


## Recessed Wall Light

3W

## Data Sheet

774-1241

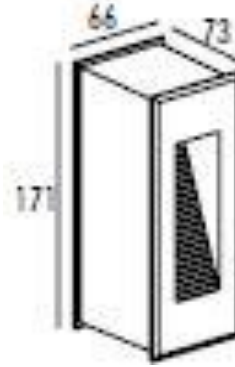

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.  
For a variety of interior and exterior lighting applications.  
The used LED technique offers durability and optimal light output with low power c

### PRODUCT SPECIFICATIONS

Body and bracket in Die cast Aluminium

Silicon rubber gasket

Clear Glass

Powdered coated with pretreatment for outdoor use.

Frost PC

Dimensions : L66 x D73 x H171 mm

Shape : N/A

LED : COD

Finish : Silver

Correlated Color Temperature (CCT) : 3000K

Lumens : 591 lm

Color Rendering Index (CRI) : 80

Reflector Degree (°) : 20

Power Factor : 0.5

Input Voltage : 200 - 240V 50Hz

Protection class IP 65 : Dust tight & Protected against water jets from any direction