


## Recessed Wall Light

3.6W

## Data Sheet

774-1261

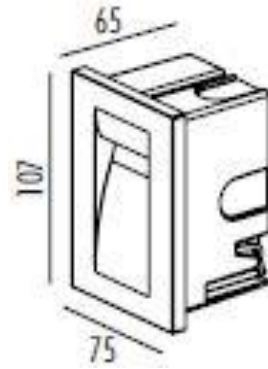

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.  
For a variety of interior and exterior lighting applications.  
The used LED technique offers durability and optimal light output with low power c

### PRODUCT SPECIFICATIONS

Body and bracket in Die cast Aluminium

Silicon rubber gasket

Clear Glass

Powdered coated with pretreatment for outdoor use.

Frost PC

Dimensions : L75 x D65 x H107 mm

Shape : N/A

LED : SMD

Finish : Silver

Correlated Color Temperature (CCT) : 3000K

Lumens : 99 lm

Color Rendering Index (CRI) : 80

Reflector Degree ( $^{\circ}$ ) : 48

Power Factor : 0.5

Input Voltage : 200 - 240V 50Hz

Protection class IP 65 : Dust tight & Protected against water jets from any direction