


## Recessed Wall Light

4W

## Data Sheet

774-1320

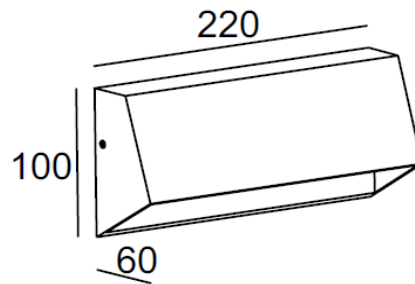

### APPLICATIONS

LED ceiling and wall luminaire made of aluminum and hand-blown crystal glass.  
For a variety of interior and exterior lighting applications.  
The used LED technique offers durability and optimal light output with low power c

### PRODUCT SPECIFICATIONS

Body and bracket in Die cast Aluminium

Silicon rubber gasket

LED driver certified by Intertek

Powdered coated with pretreatment for outdoor use.

Clear Glass

Dimensions : L220 x W60 x H100 mm

Shape : Square

LED : SMD

Finish : Graphite (Powdered)

Correlated Color Temperature (CCT) : 3000K

Lumens : 160 lm

Color Rendering Index (CRI) : 80

Reflector Degree (°) : 72

Power Factor : 0.5

Input Voltage : 200 - 240V 50Hz

Protection class IP 54

: Dust protected (no harmful deposit) &  
Protected against splashing water from  
any direction